

# Technical Data Sheet

CODE 26027

## DEUMIDO 20 EVO

Portable dehumidifiers




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	2,2	Voltage (V)	220-240
Absorbed Power max (W)	390	Weight (Kg)	13,5
Capacità serbatoio (l)	3	Delivery max (l/s)	44
Carica gas refrigerante (g)	70	Delivery max (m <sup>3</sup> /h)	160
Frequency (Hz)	50	Removerd humidity (30 °C; 80% R.H.)	20
Gas refrigerante	R290	(l/24h)	
		Sound pressure level Lp [dB (A)] 1m	45,8

### DIMENSIONS

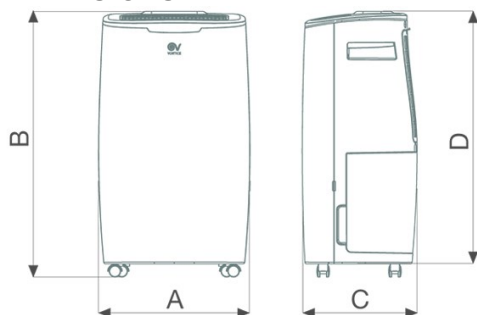

Size A (mm)	310
Size B (mm)	547
Size C (mm)	236
Size D (mm)	523

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** prevendita@vortice-italy.com

# Technical Data Sheet

CODE 26027

## DEUMIDO 20 EVO


Portable dehumidifiers



### DESCRIPTION

- Outer casing moulded from ABS thermoplastic resin.
- Water tank moulded from translucent ABS, capacity 3 liters.
- Rotary compressor with protection device timed to delay restart by 3 minutes after each shutdown.
- Two operating speeds.
- Humidistat allowing preselection of residual moisture level in the room (40%, 50%, 60%, 70% or CONTINUOUS).
- Antifreeze thermostat designed to prevent icing, thereby allowing operation even at low temperatures.
- Removable and washable dust filter to prevent the growth of bacteria and to capture airborne dust particles.
- Activated carbon filter able to keep bad smells.
- Electronic control panel that allows:
  - To switch on/off the unit,
  - To set the relative humidity threshold (40%, 50%, 60% or 70%),
  - To set Timer for the delayed automatic switching off (the delay can be set up to 24 hours),
  - To set the fan speed,
  - To set TURBO mode,
  - To modify the environment data shown on display.
- Set of indicator lights designed to show:
  - The operating status of the appliance,
  - The functioning mode (RH level or continuous functioning status),
  - The system lockout triggered when water of condensation reaches the maximum limit in the collection tank,
  - The duration of Timer setting,
  - The TURBO mode functioning.
- A pair of handles and 4 wheels allow an easier repositioning even at full tank.
- It contains R290 gas.
- Hermetically sealed equipment.

### ACCESSORIES



#### **FILTRO AI CARBONI ATTIVI FSEK1420**

Code 21019

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** prevendita@vortice-italy.com