



# ARIETT RANGE

Centrifugal duct fans

*For the ventilation of areas with intermittent use (small bathrooms, private or public toilets).*



- **2 models.**
- Motor with shielded poles and ball bearings (guaranteed for 30,000 fault-free hours of operation) and thermal overload protection.
- The timer is adjustable from 3 to 20 min.
- Protection rating: IPX4.
- Insulation class: II. □

Wiring diagrams shown from page 458

Design: F. Trabucco - M. Vecchi




## TECHNICAL DATA

Models	Code		V~50Hz	W	A	RPM	Max Airflow		Max Pressure		Lp dB(A)* 3m	Max °C
	BASIC	TIMER					m³/h	l/s	mmH₂O	Pa		
ARIETT LL	11965	11966	230	18	0.14	2315	70	19.4	12	118	40	40

\* Conforms with ISO 3744 for noise and pressure levels.

## DIMENSIONS

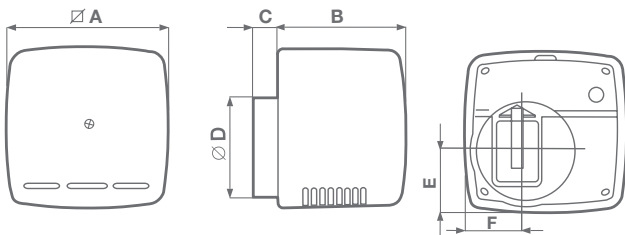




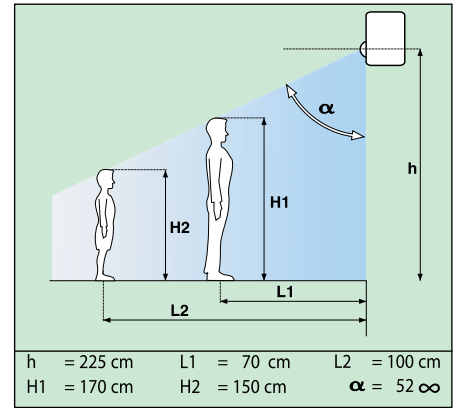
Models	A	B	C	Ø D	E	F	Kg
ARIETT LL	156	123	25	97	60	60	1.5
ARIETT LL T							

Dimensions (mm)



**PRODUCT ACCESSORIES**

Models	Code	Product	
		ARIETT LL code 11965	ARIETT LL T code 11966
 <b>C 1.5</b> Electronic speed controller 1.5 A	<b>12966</b>	●	-
<b>SCNRB</b> Built-in non-reversible electronic speed controller	<b>12971</b>	●	-
 <b>SCB KIT</b> Built-in controller adaptor for <b>C 1.5</b>	<b>22481</b>	12966	-
 <b>M 10/4</b> Air deflector	<b>22310</b>	●	●




Activation range of PIR detector.

Description and sizes on page 126; System components on page 330.

**PERFORMANCE CURVES**

**ARIETT LL code 11965**  
**ARIETT LL T code 11966**

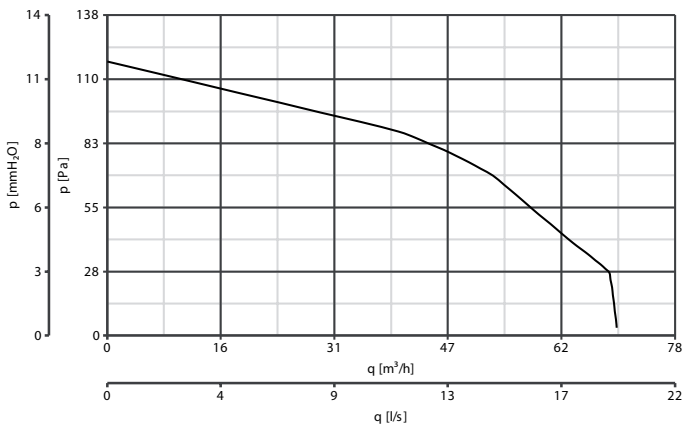

— delivery

