



ECODRY RANGE

AUTOMATIC HAND DRYERS

NEW

Electric wall-mounted and automatically operated hand dryers suitable for use in bathrooms of public places such as restaurants, hotels, service stations, swimming pools, gyms, wellness centers, spas, etc.

- 2 models



ECODRY EC code 19237
(automatic with brushless motor, low consumption)

ECODRY code 19236
(automatic)

The air outlet generates a double blade of high pressure air that ensures particularly low drying times.




BENEFITS FOR THE INSTALLER

- Easy installation: its small size facilitates installation even on walls with a reduced surface.
- Reliability, quality and safety.
- Easy maintenance. For the ECODRY EC model, the need to clean/replace the filter is indicated by the color change of the warning light integrated in the front cover.

BENEFITS FOR THE USER

- Design that can be integrated in any bathroom.
- Reliability, quality and safety.
- Lower drying times.
- Low maintenance costs.
- Intensive use.
- More bathroom decorum: no more paper on the floor or in the drains.
- Environmental sustainability: we avoid tree felling.
- Reliable and timely service: we avoid the situation when there is no more paper in the dispenser or the textile roll does not rotate or is dirty.
- Maximum hygiene: the product, thanks to its infrared sensor, is activated without touching anything, only with the hand placement.

DIMENSIONS

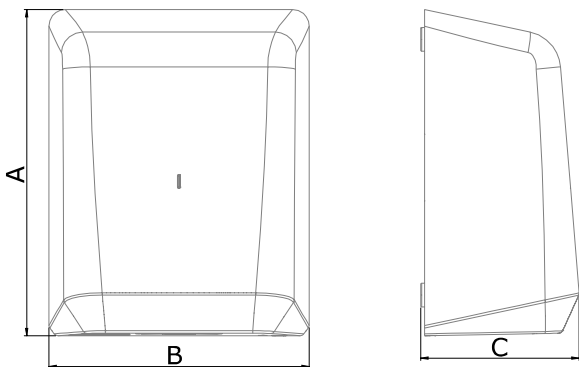

Dimensions (mm)

| PRODUCTS | A | B | C |
|-----------|-----|-----|-----|
| ECODRY | 294 | 234 | 143 |
| ECODRY EC | 294 | 234 | 143 |



ECODRY RANGE

AUTOMATIC HAND DRYERS

TECHNICAL DATA

| PRODUCTS | CODES | V~50/60HZ | W TOTAL | A MAX | MAX AIRFLOW m ³ /h | Lp dB(A) 1 m | W STAND-BY | DRYING TIME (s) | AIR SPEED m/s | KG |
|-----------|-------|-----------|------------|----------|----------------------------------|-----------------|---------------|--------------------|------------------|-----|
| ECODRY | 19236 | 220-240 | 800 | 8 | 90 | 70 | 0.5 | 12-14 | 103 | 2.6 |
| ECODRY EC | 19237 | 220-240 | 700 | 8 | 81 | 70 | 0.5 | 12-14 | 96 | 2.6 |

TECHNICAL FEATURES

- The products of the **ECODRY** range are automatic wall-mounted hand dryers, **designed for intensive use** and highly effective. The activation distance of the infrared sensor that controls the start and stop of the appliance can be set from 10-20 cm at installation; **the product stops automatically after 50" of operation**, the reactivation of the appliance requires the removal and new positioning of the hands close to the sensor. The geometry of the air outlet area generates a double blade of high pressure air that ensures particularly **short drying times**.
- AISI 304 **stainless steel molded front cover**.
- **ECODRY** model **Painted** in **glossy white**, RAL 9010.
- **ECODRY EC** model **Painted** in **mat black**.
- **Wall flange designed** to **dampen vibrations** and **attenuate noise** propagation.
- **Internal structure in self-extinguishing resin (VO)**, heat resistant.
- **Motors:**
 - **ECODRY** model, high quality collector AC motor, **thermally protected**.
 - **ECODRY EC** model, electronically controlled, **brushless (low consumption)** and thermally protected motor, **with a duration up to 3 times longer** than that of the equivalent collector motor (no longer graphite brushes but permanent magnets).
- The **ECODRY EC** model is equipped with a **HEPA filter** that captures impurities in the ambient air and **guarantees outgoing air quality**.
- Full compliance with the safety requirements issued by the International Standards certified by NEMKO.
- **Degree of protection** from dust and water: **IPX4**.
- Insulation class: I (grounding required).





ECODRY code 19236
(automatic)



ECODRY EC code 19237
(automatic with brushless motor, low consumption)