

Technical Data Sheet

CODE 19224

PREMIUM DRY A

Automatic and manual hand dryers



Certifications



IMQ



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	5,5	Shock resistance rating (IK)	09
Absorbed Power max (W)	1350	Voltage (V)	220-240
Frequency (Hz)	50-60	Weight (Kg)	2,3
Insulation Class	II°	Delivery max (l/s)	35
IP	X4	Delivery max (m³/h)	120
Motor Power (W)	45	Power in stand-by mode (W)	0,4550
		Sound pressure level Lp [dB (A)] 1m	55,2

DIMENSIONS

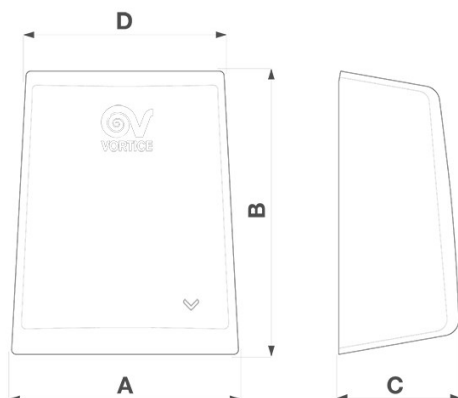

Size A (mm)	253
Size B (mm)	319
Size C (mm)	137
Size D (mm)	220

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 19224

PREMIUM DRY A

Automatic and manual hand dryers



DESCRIPTION

- Front cover made of UV-resistant plastic rated V0, colour white.
- Wall-mounting flange incorporating warm air outlet grille of moulded plastic (PP).
- EC motor with thermal overload cutout and shaft turning in ball bearings, coupled to forward-bladed centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Air flow 120 m³/h.
- Dust filter.
- Dryer operated automatically by an infrared device with activation distance of up to 35 cm, selected by means of an internal trimmer adjustable at the moment of installation. Appliance shuts down automatically in the event of the air inlet grille or the warm air outlet nozzle being obstructed intentionally or accidentally.
- IMQ safety certification.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com