

komfovent

VENTILATION UNITS

PRICE-LIST 2026-02



DOMEKT ventilation units



DOMEKT – residential ventilation units with heat recovery. Depending on the individual requirement, a rotary or counterflow plate heat exchanger, vertical, horizontal or flat duct connections can be selected from a wide range of modifications.

The capacity of ventilation units are from 50 to 1000 m³/h. All DOMEKT units are equipped with EC fan motors.

The DOMEKT series units are extremely compact and easy to install. They can be integrated into kitchen furniture, hanged on the wall or ceiling, placed on the ground.

All DOMEKT ventilation units are user friendly and designed for “Plug & Play” principle. All units have integrated control system and are fully prepared to use.

Each DOMEKT unit comes with modern control panel (must be ordered separately).

The functional design of the ventilation unit ensures the lowest cost of operation also they are safe, reliable and durable. Outdoor air is filtered and kept clean and fresh, which is especially important for people with allergies.


The color of DOMEKT series devices is white (RAL 9003), except for DOMEKT S 650 and S 800 devices, which are light gray (RAL7035).

Domekt R units with rotary condensing and sorption-enthalpy heat exchangers

Rotary heat exchangers are ideal for cold climate zones – they work efficiently both in winter and summer without icing even at extremely low temperatures, which saves a lot of energy and pays off most quickly. The sorption rotor provides better performance than a condensing rotor, it has better humidity control, higher indoor comfort and greater energy savings.

Domekt CF units with condensing and diffusion-enthalpy counterflow plate heat exchangers

Plate heat exchangers are more suitable for warmer climates, as when the outside air temperature is low, the icing starts, which results energy loss. Enthalpy counterflow heat exchangers are more efficient than condensing ones, they humidifies supplied air during the winter and more efficiently save the cold in the summer, as a result reducing the cost of air conditioning.

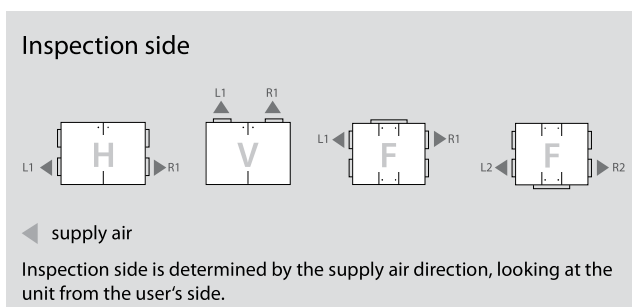

Control system KOMFOVENT C6/C6M/C8

Smart control system C6/C6M/C8 – designed for end users, has wide control possibilities and simple navigation. Core philosophy behind the design of C6/C6M/C8 was so that the ventilation unit would operate properly without constant adjustments from the user. Different ventilation modes are optimized for the user's daily needs. The user-friendly interface allows you to intuitively control the air handling unit.

SMART control functions:


- Supply air temperature control
- Extract air temperature control
- Room air temperature control
- Temperature balance control
- Constant air volume control (CAV)¹
- Variable air volume control (VAV)^{1,2}
- Directly controlled volume (DCV)¹
- External water coil control
- External DX unit control
- Weekly operation schedule
- Holidays planning
- Air quality control²
- Operation on demand²
- Cool recovery
- Temperature saving function
- Free cooling
- Ventilation control by external contacts
- Control via internet browser
- Control with smartphones

¹ except control system C8


² these functions require additional accessories


Safety functions:


- Filter clogging indication
- Water mixing system warming-up
- Rotor warm-up and cleaning function
- Heat exchanger frost protection
- Heat exchanger failure indication
- Water heater frost protection
- Electric heater overheat protection
- Low air flow indication
- Emergency shut down in case of fire
- Emergency shut down when temperature reaches critical limits
- Intelligent self-diagnostic

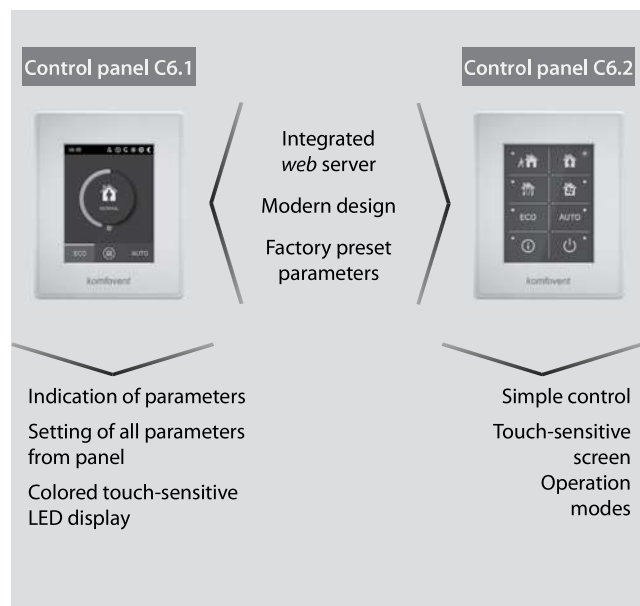

DOMEKT ventilation units




	Unit marking	PRICE units with C6M or C8 control system (control panel not included)	
		PRICE without VAT, EUR	
		Condensing – L/A	Sorption – L/AZ
		F7/M5 ePM1 60 / ePM10 50	F7/M5 ePM1 60 / ePM10 50
 Units with a rotary heat exchanger	Domekt R 150 F C8	1 880,00	1 948,00
	Domekt R 200 V C8	1 999,00	-
	Domekt R 200 V C8 E1	2 049,00	-
	Domekt R 200 V C8 VSO	4 226,00	-
	Domekt R 250 F C8	2 097,00	2 168,00
	Domekt R 300 F C8	2 337,00	2 446,00
	Domekt R 350 V C8	2 338,00	2 449,00
	Domekt R 400 V C6M	2 449,00	2 560,00
	Domekt R 400 H C6M	2 606,00	2 714,00
	Domekt R 400 F C6M	2 617,00	2 760,00
	Domekt R 450 V C6M	2 721,00	2 849,00
	Domekt R 600 V C6M	3 597,00	3 774,00
	Domekt R 600 H C6M	3 005,00	3 140,00
	Domekt R 700 V C6M	4 074,00	4 249,00
	Domekt R 700 H C6M	3 917,00	4 091,00
	Domekt R 700 F C6M	4 493,00	4 669,00
	Domekt R 900 V C6M	4 522,00	4 783,00

	Unit marking	PRICE units with C6, C6M or C8 control system (control panel not included)	
		PRICE without VAT, EUR	
		Condensing	Enthalpic
		F7/M5 ePM1 60 / ePM10 50	F7/M5 ePM1 60 / ePM10 50
 Units with a counterflow plate heat exchanger	Domekt CF 200 F C8 (EPP)	1 700,00	2 400,00
	Domekt CF 250 F C6	2 150,00	3 147,00
	Domekt CF 400 V C6M	2 783,00	3 325,00
	Domekt CF 500 F C6M	2 998,00	4 718,00
	Domekt CF 700 V C6M	3 626,00	4 599,00
	Domekt CF 700 H C6M	3 626,00	4 599,00
	Domekt CF 700 F C6M	3 905,00	5 538,00

	Unit marking	PRICE units with C5 control system (control panel not included)
		PRICE without VAT, EUR
		F7 ePM1 60
 Supply air units	Domekt S 650 F E/3 C5	1 784,00
	Domekt S 650 F E/6 C5	1 841,00
	Domekt S 800 F E/6 C5	1 923,00
	Domekt S 800 F E/9 C5	2 038,00
	Domekt S 800 F W C5	1 980,00
	Domekt S 1000 F E/9 C5	2 273,00
	Domekt S 1000 F E/15 C5	2 399,00
	Domekt S 1000 F W C5	2 304,00

Notes

- Units with C6, C6M and C8 control system are equipped with electric heater. Duct mounted water heaters DH can be ordered separately (settings must be changed to activate water heater function).
- DOMEKT R 200 VSO C8 – outdoor residential ventilation unit is placed against the outer wall of an apartment, it has integrated air closing dampers and silencers, available colors: RAL9003, RAL7035, RAL7016 and RAL9005.

	Control panel and cable (10 m)*		Control panel with connected cable (3 m)**	
	Code	PRICE without VAT, EUR	Code	PRICE without VAT, EUR
Panel C6.1 	1258190	270,00	1253043	285,00
Panel C6.2 	1258191	120,00	1253338	135,00
Panel C5.1 	745201511	270,00	1253444	285,00

* Panel with a supplied (unmounted) 10 metre cable with an RJ9 connector.
 ** Panel with a surface-mounted 3 metre cable with an RJ9 connector, attached from the bottom.

Ordering sample:

DOMEKT-R-400-V-L1-F7/M5-C6M-L/A

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① **Series:** DOMEKT

- ② **Type of heat exchanger:** R – rotary; CF – counterflow; S – supply unit

- ③ **Unit size:** 150, 200, 250, 300, 350, 400, 450, 500, 600, 650, 700, 800, 900, 1000

- ④ **Duct connection:** V – vertical; H – horizontal; F – ceiling

- ⑤ **Inspection side:** R1; R2; L1; L2

- ⑥ **Air filter class:** F7/M5 (ePM1 60 / ePM10 50)

- ⑦ **Controller:** C6, C6M, C5 and C8

- ⑧ **Heat exchangers characteristic:** L/A; L/AZ; ER (enthalpy heat exchanger)