



EASY DRY RANGE

AUTOMATIC AND MANUAL HAND AND HAIR DRYERS

Electric manual and automatic wall-mounted hair or hand dryers. Suitable for applications characterized by heavy daily use, typical of public areas such as changing rooms of gyms, swimming pools, saunas, communities, etc.

- 2 models



EASY DRY AUTO code 70904
(automatic)

"Cassette" type lower filtering grille.



EASY DRY MANUAL code 70909
(manual)

EASY DRY MANUAL is activated by pressing the button, air delivery can be set from 1-8 minutes, using the internal trimmer.



Tested to work even in contact with water jets and therefore compatible with Zone 1 bathroom installation.


BENEFITS FOR THE INSTALLER

- Easy installation.
- Reliability, quality and safety.
- Easy maintenance thanks to the “cassette” type filtering grille.
- Application flexibility: can be installed as hand or hair dryers.

BENEFITS FOR THE USER

- Anti-vandal.
- Modern design by D. Piva.
- Can be connected to an external coin collector.
- Flexibility of use: hand or hair dryers.
- Reliability, quality and safety.
- Lower drying times.
- Low maintenance costs.
- Intensive use.
- More bathroom decorum: no more paper on the floor or in the drains.
- Environmental sustainability: we avoid tree felling.
- Reliable and timely service: we avoid the situation when there is no more paper in the dispenser or the textile roll does not rotate or is dirty.
- Maximum hygiene: the automatic products are activated through the infrared sensor without touching anything, only with the hand (if hand dryer) or head placement (if hair dryer).

DIMENSIONS

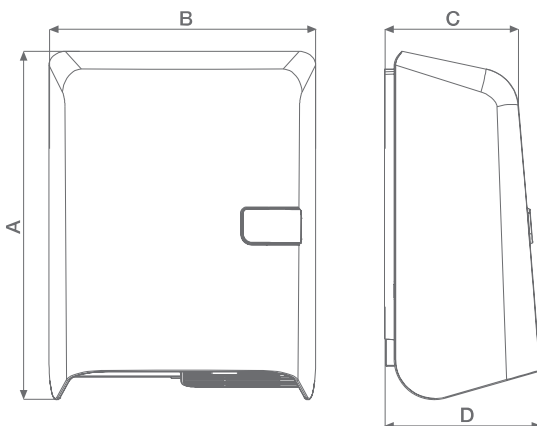

Dimensions (mm)

PRODUCTS	A	B	C	D
EASY DRY AUTO	346	265	133	155
EASY DRY MANUAL	346	265	133	155



EASY DRY RANGE

AUTOMATIC AND MANUAL HAND AND HAIR DRYERS

TECHNICAL DATA

PRODUCTS	CODES	V~50/60HZ	W TOTAL	W MOTOR	A MAX	MAX AIRFLOW		Lp dB(A) 1 m	W STAND-BY	IK	KG
						m ³ /h	l/s				
EASY DRY AUTO	70904	220-240	1800	70/85	8	190	37.5	61	0.4900	9	3.1
EASY DRY MANUAL	70909	220-240	1800	70/85	8	135	37.5	61	0.5010	9	3.1

TECHNICAL FEATURES

- **2 models**, in **manual** and **automatic** version.
- **Front covers in white plastic resin (PC-ABS)**, **resistant to impacts and aging** caused by possible sun exposure; locking system with Allen screws to avoid tampering. The product particular geometry, without surfaces on which to place cigarettes or other potentially dangerous objects, ensures user safety and product durability. **The perimeter gasket** at the edges of the appliance in contact with the installation wall **avoids the progressive soiling** caused by the dust suctioned by the appliance.
- **Wall flanges in plastic resin** with mineral filler, **to dampen vibrations and attenuate noise** propagation.
- Lower “cassette” type filtering grilles made of heat-resistant plastic resin (PC), including mesh filters molded in the same material.
- High-efficiency centrifugal fans powered by thermally protected induction motors.
- Electric heaters protected by a safety thermal fuse and a resettable thermal limiter.
- **EASY DRY MANUAL: start button** made of **shock proof** plastic resin (PC), resistant to impacts and aging caused by possible sun exposure. **Timer** to adjust the operating cycle duration can be set from 1-8 minutes at installation, using the internal trimmer.
- **EASY DRY AUTO: infrared sensor** for automatic activation / shutdown of the product; the activation range can be set from 0-35 cm, using the internal trimmer.
- **Anti-vandal function: integrated in the control electronics** of the product to automatically stop the product after about 10' of uninterrupted operation. The appliance can be restarted after about 10" from the removal of any obstacles previously placed close to the sensor.
- Safe use certified by a third party, **IMQ** (IMQ).
- **Degree of protection** from dust and water: **IPX4**.
- Electrical insulation class: II (grounding not required).
- Compliant with the requirements of European Regulation 1275/2008/EU.